

## ECO-i™ Submittal Data

### CZ-CFUNC1U

#### Communication Adapter

Job Name: \_\_\_\_\_  
 Location: \_\_\_\_\_  
 Engineer: \_\_\_\_\_  
 Submitted to: \_\_\_\_\_  
 Submitted by: \_\_\_\_\_  
 Reference: \_\_\_\_\_


Approval: \_\_\_\_\_  
 Date: \_\_\_\_\_  
 Construction: \_\_\_\_\_  
 Unit#: \_\_\_\_\_  
 Drawing#: \_\_\_\_\_

#### Features / Benefits


Enables Control of up to 256 Units (with Intelligent Controller)

#### Applications

Healthcare Facilities  
 Office Buildings  
 Apartment Buildings  
 Assisted Living

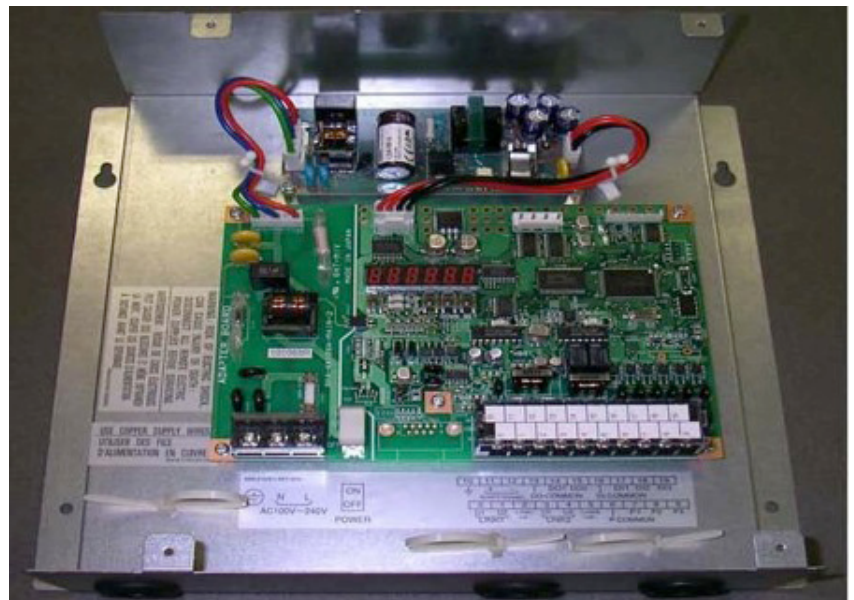

# Dimensions

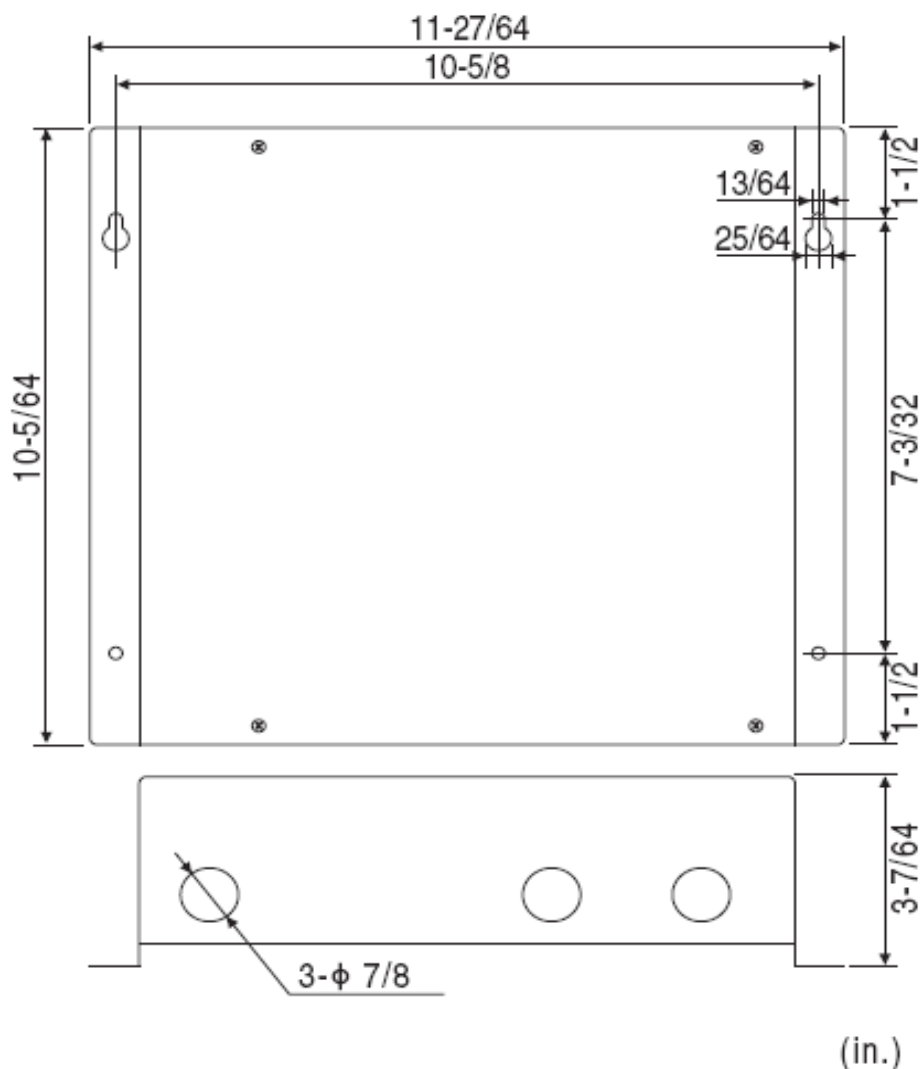

Rated voltage .....	100 - 240 V 1-PH
Rated frequency .....	50/60 Hz
Power consumption .....	5.6 W max
Operating temperature .....	14 to 122°F
Operating humidity .....	20 to 80% (no condensation)

**Panasonic**